




Key Features



1/3 " progressive scan CMOS



2.7 – 12mm motorized lens



4 MPx (2592×1520) @ 25/30fps



IK10 impact rating



Triple Streams



3D DNR, Real WDR, Defog



IP67 outdoor rating



5 Year Warranty



Smart IR technology, range up to 164 Ft.

Specifications

General

Image Sensor	1/3" Progressive Scan CMOS
Pixel Count	2592(H)×1520(V)
Shutter	Automatic / Manual
Shutter Speed	1/5 to 1/20,000 Seconds
Signal / Noise Ratio	55 dB
IR Technology	Smart IR
IR Range	Up to 164 Feet (50 Meters)
IR Control	Automatic / Manual (On / Off)
Minimum illumination (B/W)	0 Lux with IR LEDs On
Minimum illumination (Color)	0.05 Lux @ F1.2 with AGC On
Day / Night Settings	Automatic / Day / Night / Timed
Day / Night Method	Infrared Cut Filter (ICR)
Interoperability	ONVIF, CGI
Storage	Supports Micro SD Card 128GB

Video

Max. Resolution	4 MPx (2592 x 1520)
Stream Count	3 Streams
Stream Per Frame Rate	Stream1: 2592×1520 @ 25/30 fps
	Stream2: D1 @ 25 / 30 fps
	Stream3: VGA @ 25 / 30fps
Bit Rate Encoding Control	Constant (CBR) / Variable (VBR)
Bit Rate	Stream1: 200 kbps to 12 Mbps
	Stream2: 100 kbps to 6 Mbps
	Stream3: 100 kbps to 3 Mbps
Image Enhancement	DIS/HLC/BLC/Anti-shake/Defog
Noise Reduction	2D / 3D Digital Noise Reduction (DNR)
Wide Dynamic Range	120 dB
	True WDR

Camera Lens

Focal Length	2.7 to 12 mm
Lens Type	Motorized
Maximum Aperture	F1.3
Angle of View	30° to 100°
Focus Control	Motorized
Iris	Auto Iris

Interface

Ethernet	1 Ethernet RJ45 Connector (10/100 Base-T)
Audio	1 Input Channel / 1 Output Channel
Alarm	1 Input Channels / 1 Output Channels
RS485	Supported
CVBS Output	Supported
Reset Button	Supported

Audio

Audio Compression	G.711, RAW_PCM
Bit Rate	64kbps (G.711), 128kps (RAW_PCM)

Intelligence Video Analytics

Region of Interest	8 Zones (On / Off)
Privacy Masking	4 Areas (On / Off)
Gain Control	Automatic/Manual
White Balance	Automatic
View Adjustments	Mirror Mode
	Aisle Mode
Basic Analytics	Motion Detection
	Perimeter Intrusion Detection
	Single Virtual Fence
	Bad Signal
Advanced Analytics	Loitering Trace
	Multi Loitering Trace
	Double Virtual Fence
	Object Left Alone Detection
	Object Removed Detection
	Illegal Parking Detection
	Abnormal Speed Detection
	Converse Detection

Electrical

Power Supply	PoE+ / 12 VDC (Requires Adapter)
Power Consumption	10.5 W @max

Mechanical

Material	Metal Casing
Dimensions	φ4.33 × 14.78 Inch (φ110 ×375.5 mm)
Net Weight	3.70 Lbs (1.68 g)

Environmental

Operating Temperature	-40°F to 140 °F (-40°C to 60°C)
Operating Humidity	Less than 90% RH
Ingress Protection	IP67 Outdoor Rated


Network

Protocols	IPv4 / IPv6, 802.1x, HTTP, HTTPS, TCP/ IP, UDP / IP, RTSP, DHCP, NTP, RTCP / RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP
Streaming Method	Unicast
Maximum Accessible Users	10 Users
Web Viewer	Internet Explorer, Chrome, Firefox
Management Software	VTS (Video Center)
	VSMP (Viotec Security Management Platform)

Regulatory


Certifications	CE / FCC
----------------	----------

Dimensions (mm)

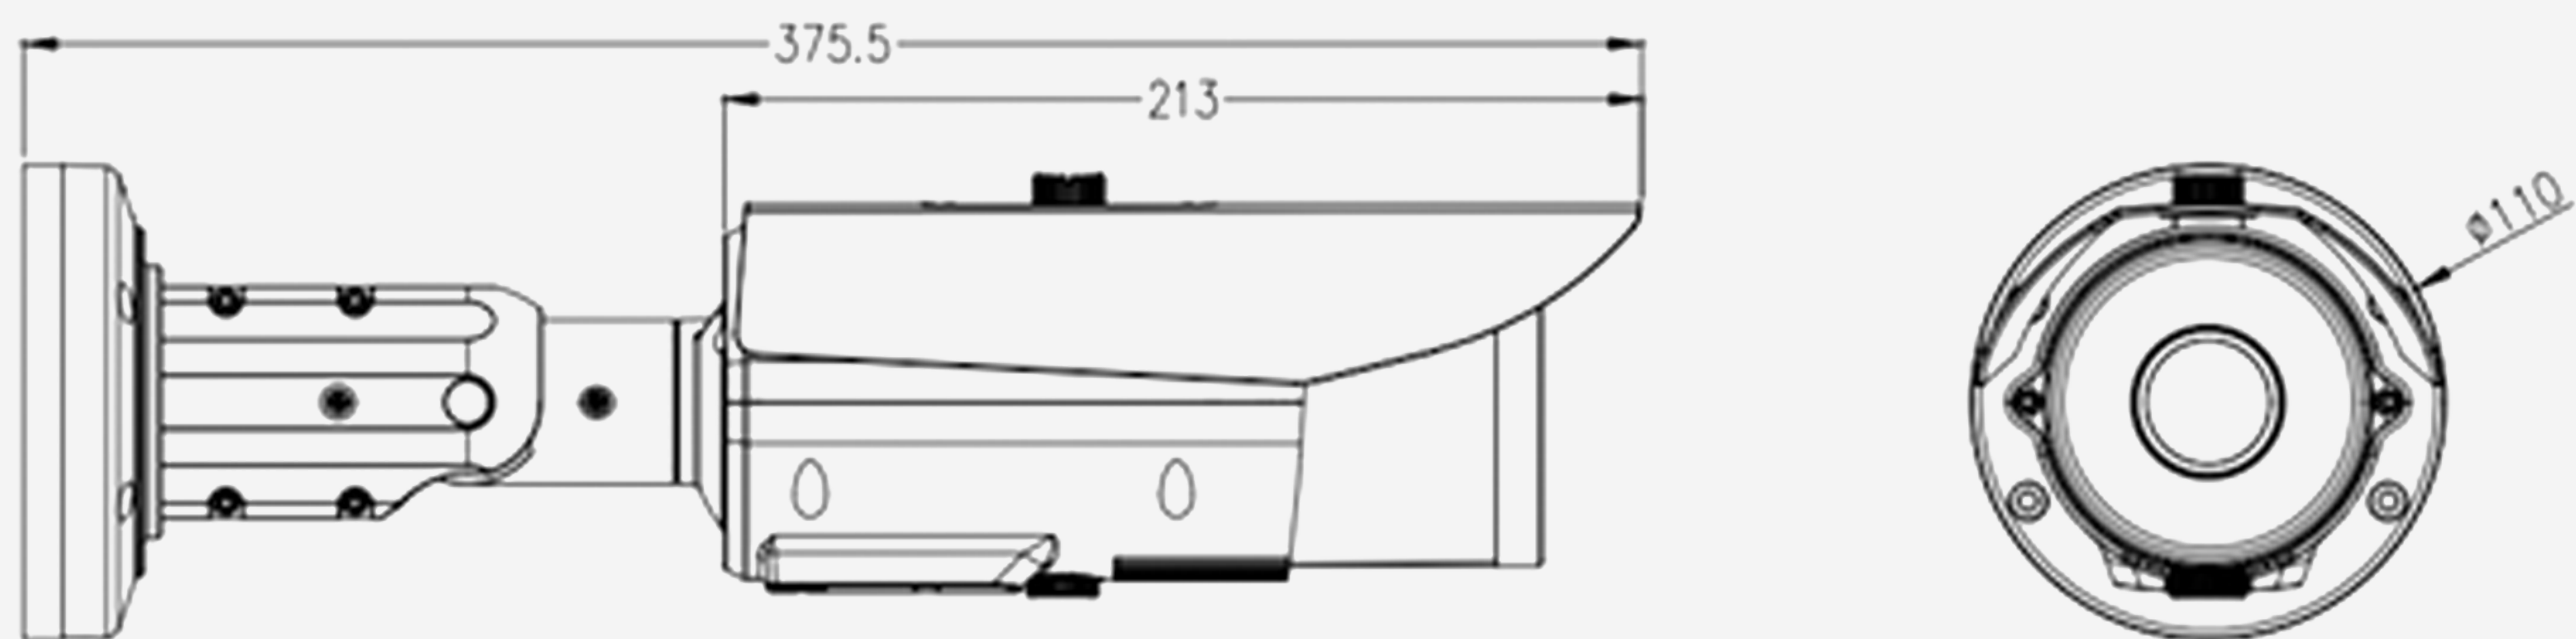

Accessories

01

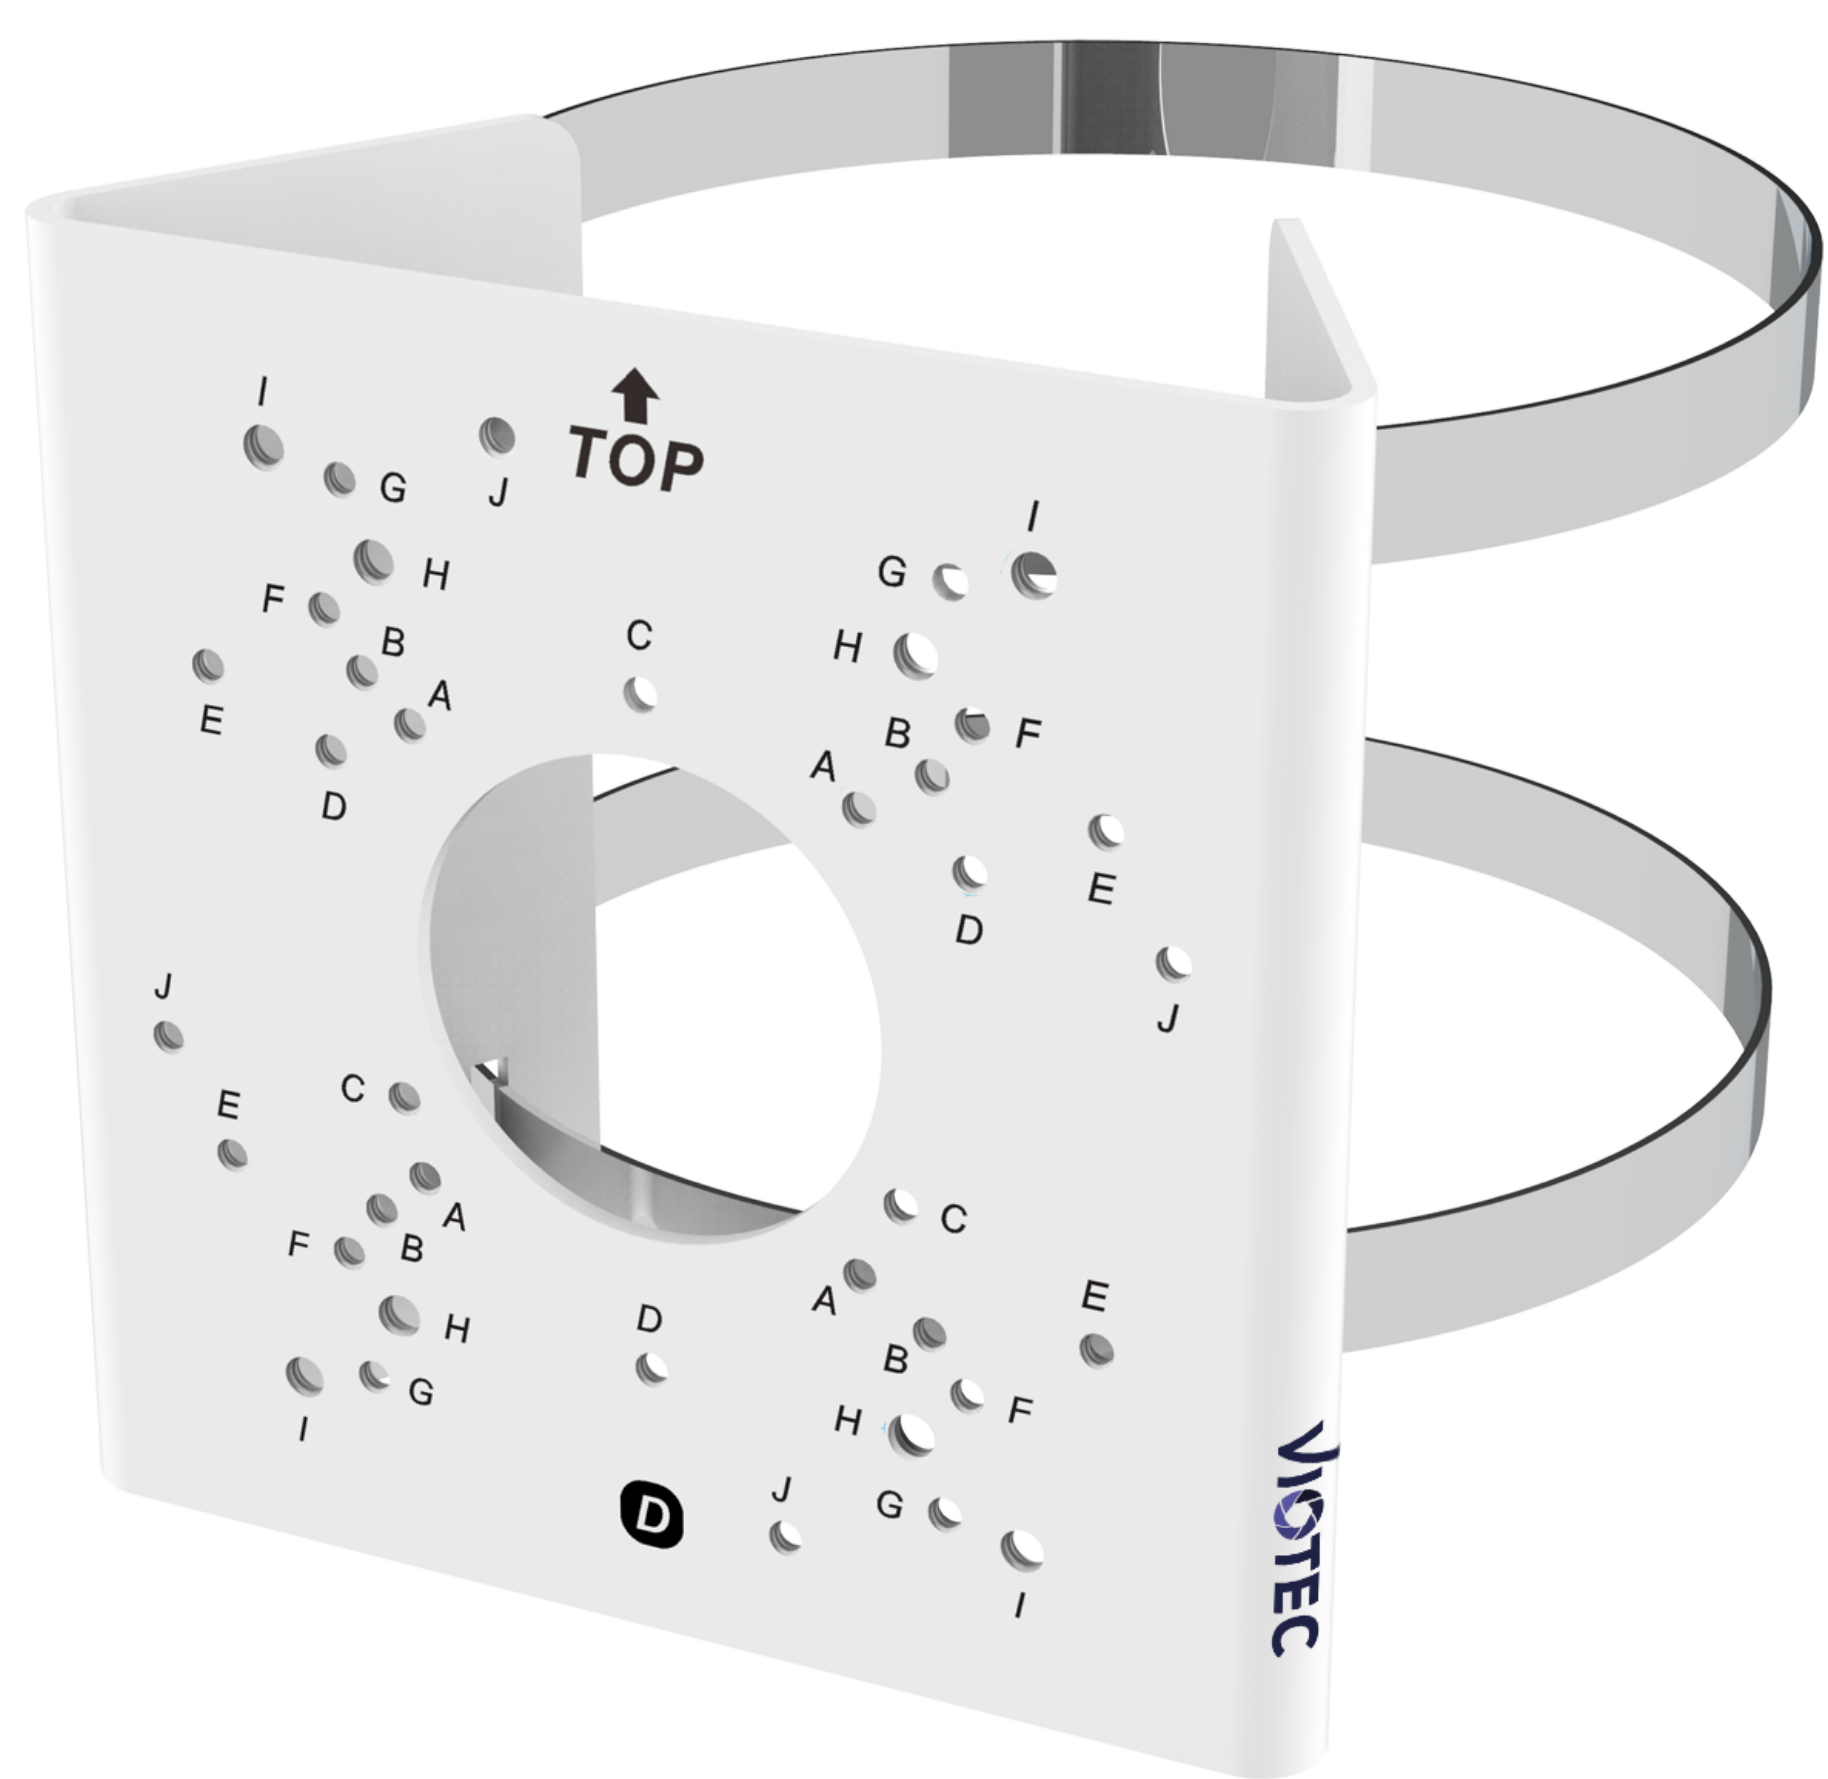

VT-CACC-BC-PMB
(Pole Mounting Bracket)

02



VT-CACC-BC-JB
(Junction Fixation Box)

Ordering Information

Model	Description
VT-ECAM-B04-AM	4 MPX BULLET NETWORK CAMERA
VT-CACC-BC-JB	JUNCTION FIXATION BOX
VT-CACC-BC-PMB	POLE MOUNTING BRACKET



Adkinns
US Office

200 Continental Dr
Newark, DE 19713
United States
+1302 318 1311
info@viotec.us
www.viotec.us

Viotec warrants all its products against any and all manufacturing defects from the date of product delivery from the factory and/or distribution center. Viotec's enterprise series has a warranty of 5 years

VT-ECAM-B04-AM – Datasheet V.001



©2021, Viotec, Inc, all rights reserved . We reserve the right to change the design and specifications without notice. Viotec Inc is a specialised security manufacturer that is fully owned by Adkinns Inc.